

# KF131

## COPY ROUTER WITH TRIPLE DRILLING UNIT & SELF CENTERING ARMS




### FEATURES

- Variable use routing machine for both pvc and aluminium
- Copy routing 1:1 ratio from either routing template to the profile
- Height adjustable triple spindle drilling unit
- Pneumatic clamping
- Self centring arms controlled by front mounted handwheel
- Mechanical slide stops for large area or out of template routing
- Can be set up for night vents and door routing
- Pneumatic stylus pin for ease of positioning
- Maintenance friendly

# KF131

## COPY ROUTER WITH TRIPLE DRILLING UNIT & SELF CENTERING ARMS

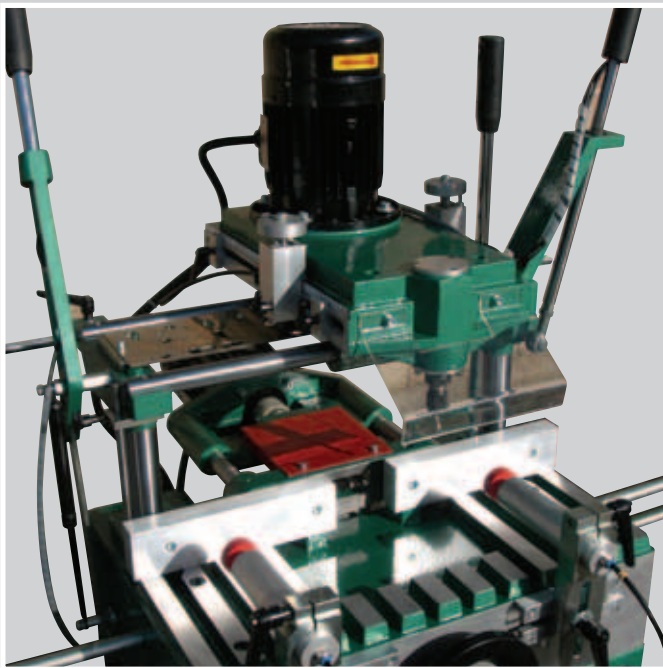

### TECHNICAL DATA

Length	1720mm
Width	900mm
Height	1550mm
Weight	150kg
Cutter by Stand:	
Rev of motor	
Rev of milling cutter spindle	
Working Length (left to right)	220mm
Working Length (front to back)	115mm
Leveling combined triplicate-drills:	
Rev of motor	
Drills distance from the centre	22mm
Working length	6-80mm

WEGOMA reserve the right for any technical change.

### Standard Configuration

- |                                 |                                |
|---------------------------------|--------------------------------|
| 1. Pneumatic clamping device    | 4 set                          |
| 2. Triple drills                | 1pcs for left & 2pcs for right |
| 3. 8mm single flute cutter      | 1 pcs                          |
| 4. 8mm spring collet of cutter  | 1 pcs                          |
| 5. Automatic positioning device | 1 set                          |
| 6. Tools kit                    | 1 set                          |
| 7. Operations manual            | 1 copy                         |

### Optional Configuration

1. Single-phase motor
2. Double-speed motor
3. Cooling system
4. 10mm spring collet of cutter

Wegoma GB  
 Unit 8  
 Dunsar Industrial Estate  
 Blackburn Road  
 Bolton  
 Lancashire  
 BL7 9PQ

T: 00 +44 1204 303777  
 F: 00 +44 1204 303888  
 E: info@wegomagb.com