

# KF227

## COPY ROUTING MACHINE




### FEATURES

- Single top head copy routing machine for working with uPVC and aluminium profiles
- Copy template system gives 1:1 ratio
- Routing slot for locking bolt and keyhole of aluminium, uPVC and steel sections
- Size and form of the routed shape are adjusted by means of templates
- Two step copy pin for working with routers 5mm and 8mm diameter
- Length and width of the shape can be adjusted by means of graduations
- Pneumatic horizontal double clamping
- The templates are changeable, this guarantees the possibility of routing all kinds of shapes.
- Motor control by means of contactors
- Possibility of copy routing from stops (only rectangular routing patterns)

# KF227

## COPY ROUTING MACHINE

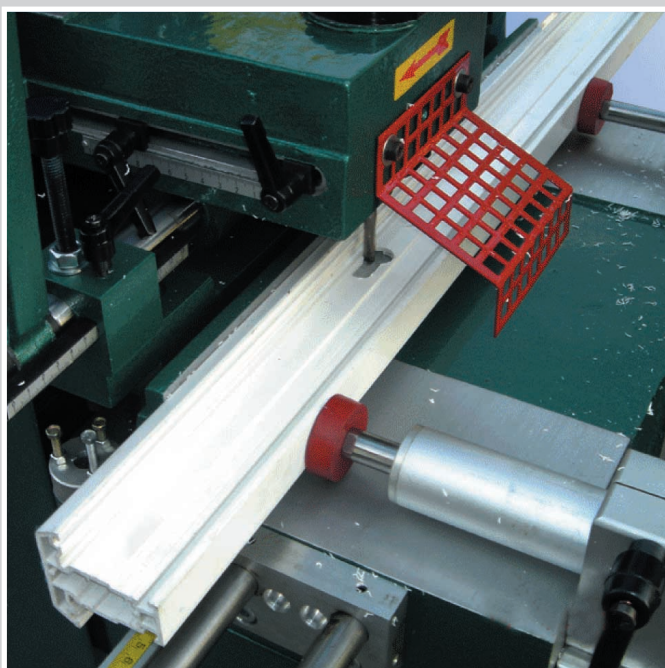

### TECHNICAL DATA

Length	700mm
Width	650mm
Height	1450mm
Weight	105kg
Power supply	230V/400V,3PH,50Hz N.PE
Power output	1100W
Compressed air supply	6-8bar
Air consumption per working cycle	100L/min
Spindle speed	12000rpm
Routing spindle stroke max.	260x110mm

WEGOMA reserve the right for any technical change.

### FEATURES

- Routing slot for locking bolt and keyhole of aluminium, uPVC and steel sections
- Size and form of the routed shape are adjusted by means of templates
- Two step copy pin for working with routers 5mm and 8mm diameter
- Length and width of the shape can be adjusted by means of graduations
- Pneumatic horizontal double clamping
- The templates are changeable, this guarantees the possibility of routing all kinds of shapes.
- Motor control by means of contactors
- Possibility of copy routing from stops (only rectangular) routing patterns)

#### Optional Accessories:

- 1500mm Length Stop and Measuring system
- Support
- Cooling Spray Mist

Wegoma GB  
Unit 8  
Dunscar Industrial Estate  
Blackburn Road  
Bolton  
Lancashire  
BL7 9PQ

T: 00 +44 1204 303777  
F: 00 +44 1204 303888  
E: info@wegomagb.com