

KL148

V-CUTTING SAWS

SEMI-AUTOMATIC / MANUAL FEED



FEATURES

- For V-cutting of uPVC
- Pneumatic feeding
- Automatic working cycle
- Continuous and variable speed
- Depth of V-cut is easily adjustable with 14 preset positions
- Two sawblades on two separate, powerful motors fixed at 45 degrees, simultaneous feeding





- Carriages move exactly over precise ball bearings on hardened and polished guide rods
- Pneumatic horizontal clamping cylinder- fast change of workpiece
- Operation through footpedal switch
- Switch off automatically for safety protection
- Cutting and counter cutting in one working cycle
- Double cutting possible
- Fast and accurate V-notch depth with precise metric scale

KL148

V-CUTTING SAWS

SEMI-AUTOMATIC / MANUAL FEED

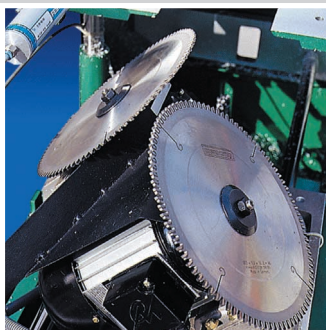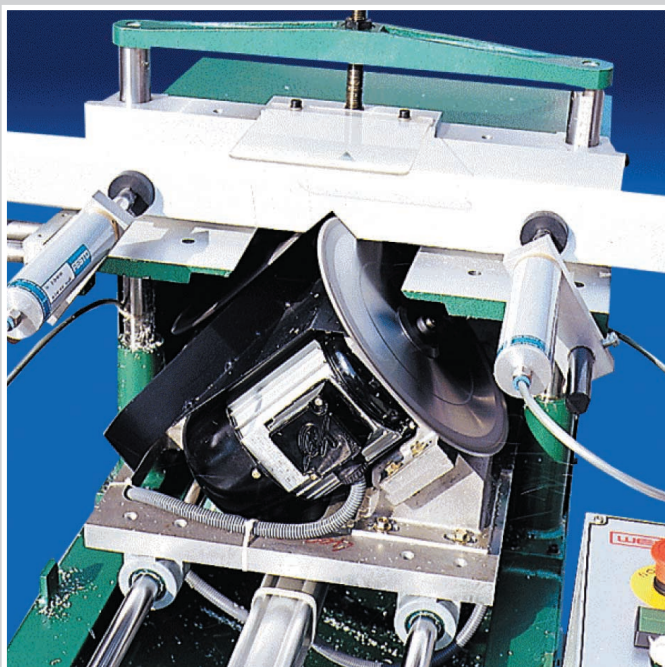

TECHNICAL DATA

Length	1250mm
Width	650mm
Height	1150mm
Weight	129kg
Power supply	230V/400V,3PH,50Hz N.PE
Power output for two motor	2x0.75w
Compressed air supply	6-8bar
Air consumption	150L/min
Spindle speed	2800rpm
Profile height max.	150mm
Profile width max.	150mm
Depth cutting max.	63mm

WEGOMA reserve the right for any technical change.

FEATURES

KL148P

- Pneumatic feeding sawblade
- Automatic working cycle
- Continuous & variable speed

KL148M

- Manual feeding sawblade

Additional Accessories

- Sawblades 250x3.2x32/96
- Complete toolset
- Operating manual

Optional Accessories

- 1500mm length stop
- Support
- Cooling Spray Mist
- Centering System

Wegoma GB
Unit 8
Dunscar Industrial Estate
Blackburn Road
Bolton
Lancashire
BL7 9PQ

T: 00 +44 1204 303777
F: 00 +44 1204 303888
E: info@wegomagb.com